LIFT ANNOUNCES RESULTS FROM SUMMER DRILLING AT THE ADINA LITHIUM PROJECT, QUÉBEC

November 17, 2026 – Vancouver, B.C., Li-FT Power Ltd. ("**LIFT**" or the "**Company**") (**TSXV: LIFT**) (**ASX: LFT**) (**OTCQX: LIFFF**) (**Frankfurt: WS0**) is pleased to report results from 11 drill holes completed at the Adina Lithium Project ("Adina" or the "Project") in Québec, Canada (**Figures 1, 2**). These holes form part of LIFT's 2026 work program, which comprised 39 holes totalling 11,420.5 metres, and follow the assay results from the first five holes announced October 26, 2026. LIFT also completed sampling of six geotechnical holes drilled in 2024, totalling 1,983 metres, that were previously unassayed for lithium. Accordingly, the cumulative 2026 drill core processed by LIFT comprises 45 holes and 13,403.5 metres.

Intersections from the 11 new holes (ALP0006 to ALP0016) are presented in **Table 1** and shown in **Figures 2, 3, 4, 5, 6, and 7**. Highlights include an intersection of 45 metres (downhole length) averaging 2.71% Li_2O from hole ALP0007. Holes ALP0006 and ALP0008 were drilled to collect geotechnical information to support future feasibility studies, not spodumene mineralization.

Table 1: Notable results for diamond drill holes presented in this news release.

Hole No.	From (m)	To (m)	Interval (m)	Li_2O%	Zone
ALP0006	Drilled for geotechnical information				
ALP0007	**164**	**209**	**45**	**2.71**	**Galinée**
ALP0008	Drilled for geotechnical information				
ALP0009C	308	313	5	1.53	Main
ALP0010	197	206	9	0.78	Main
ALP0010	339	365	26	1.86	Footwall
ALP0011	No significant intersections				
ALP0012C	204	212	8	1.43	Galinée
ALP0013	248	252	4	2.47	Galinée
ALP0013	285	295	10	1.56	Galinée
ALP0014	185	197	12	3.14	Galinée
ALP0014	210	215	5	0.51	Galinée
ALP0015	186	198	12	0.60	Galinée
ALP0015	378	380	2	0.84	Galinée
ALP0015	395	397	2	1.75	Galinée
ALP0016	185	210	25	2.71	Galinée

*Intersections are reported using a nominal 0.5% Li_2O cut-off grade, with a minimum composite width of 5 metres and maximum consecutive internal dilution of 5 metres. Intervals are downhole lengths; true thickness is unknown.

Francis MacDonald, President & CEO of LIFT, commented:

"Galinée is delivering exactly what we hoped for when we consolidated it into the project in May. Hole ALP0007 returned 45 metres at 2.71% Li_2O, ALP0016 returned 25 metres at 2.71% Li_2O, and ALP0014 returned 12 metres at 3.14% Li_2O. These are wide, high-grade intersections from a zone that had seen limited drilling before this year, and they confirm Galinée as a high-grade part of the Adina system. Galinée was the main focus of our 2026 program, and these results will feed directly into the updated Mineral Resource Estimate and Preliminary Economic Assessment targeted for

early 2027. Grade is one of the biggest drivers of project economics. Adding high-grade tonnes at Galinée, together with our option on the Renard processing facility, strengthens our path toward a new source of spodumene concentrate in Québec."

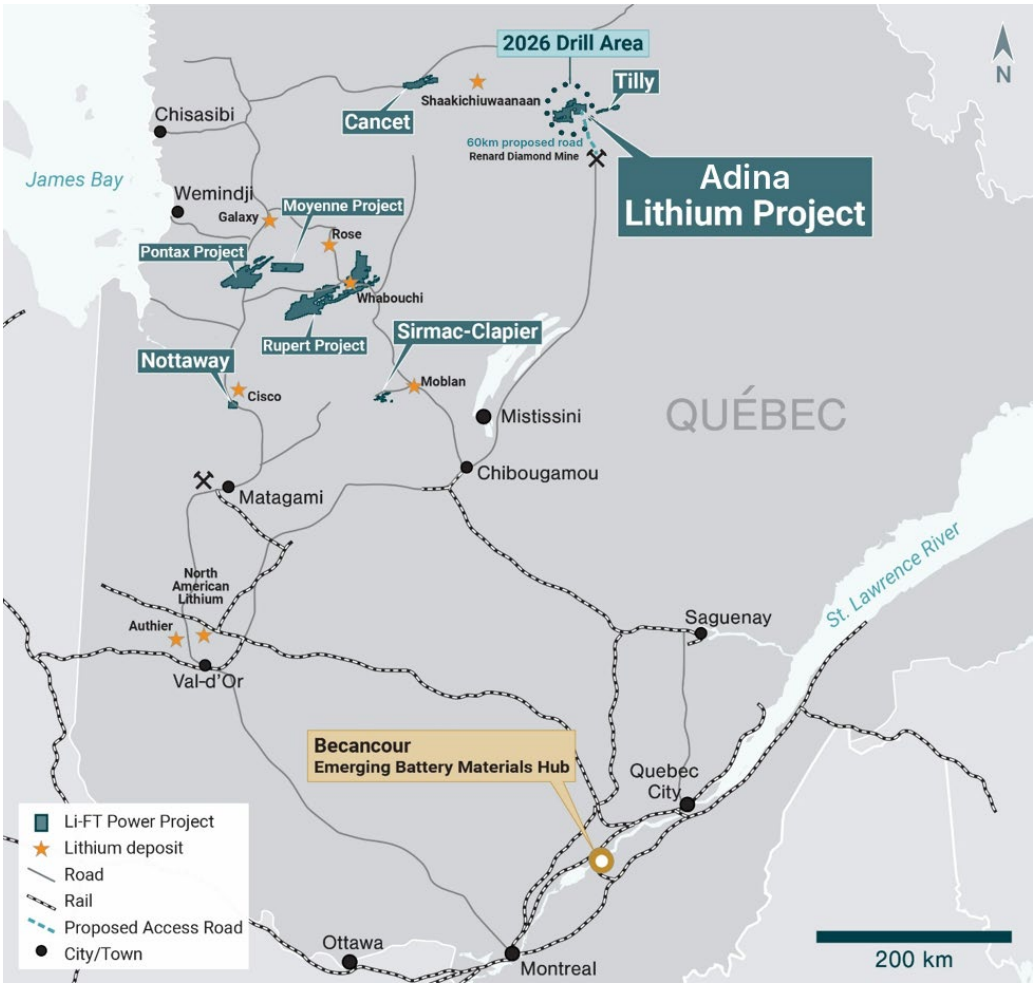


Figure 1 – Location of LIFT's spodumene pegmatite properties in Québec, Canada

The Adina spodumene pegmatite complex comprises several pegmatite zones within a corridor approximately 350 metres wide that can be traced along strike for up to 2.5 kilometres, both at surface and under cover. The Adina Main and Footwall zones are the most extensively drilled, while the Galinée Zone, although occurring within the same corridor, remains comparatively underexplored, having been located on a separate mineral property until May 2026[1]. Together, these three zones define an east-west trending dyke system comprising multiple subparallel dykes ranging from less than 1 metre to 60 metres in thickness and dipping southward at approximately 35°.

LIFT's 2026 work program focused primarily on the Galinée Zone (**Figures 4, 5, 6, and 7**), with drilling designed to establish a level of geological understanding comparable to that of the Adina Main and Footwall zones. The results of this work will contribute to the integration of the Adina and Galinée zones into an updated Mineral Resource Estimate and Preliminary Economic Assessment, both targeted for early 2027[2].

[1] LIFT, ASX announcement released on 21 May 2026.
[2] LIFT, Prospectus released on 11 August 2026, page 13.

On a regional scale, the Adina Lithium Project is located in the Eeyou Istchee James Bay region of Québec, Canada, a well-established hard-rock lithium district hosting several significant spodumene-bearing pegmatite deposits (**Figure 1**). These include the Shaakichiuwaanaan Project, with mineral reserves of 84.3 Mt at 1.26% Li_2O, all in the Probable category[3]; the Moblan Lithium Project, with mineral resources of 121.0 Mt at 1.19% Li_2O, comprising 6.3 Mt at 1.50% Li_2O Measured, 101.4 Mt at 1.19% Li_2O Indicated and 13.3 Mt at 1.06% Li_2O Inferred[4]; and the Whabouchi Lithium Project, with mineral resources of 26.9 Mt at 1.45% Li_2O (18.7 Mt at 1.51% Li_2O Indicated and 8.3 Mt at 1.31% Li_2O Inferred, exclusive of ore reserves), and ore reserves of 26.5 Mt at 1.32% Li_2O (10.5 Mt at 1.40% Li_2O Proved and 16.0 Mt at 1.27% Li_2O Probable)[5].

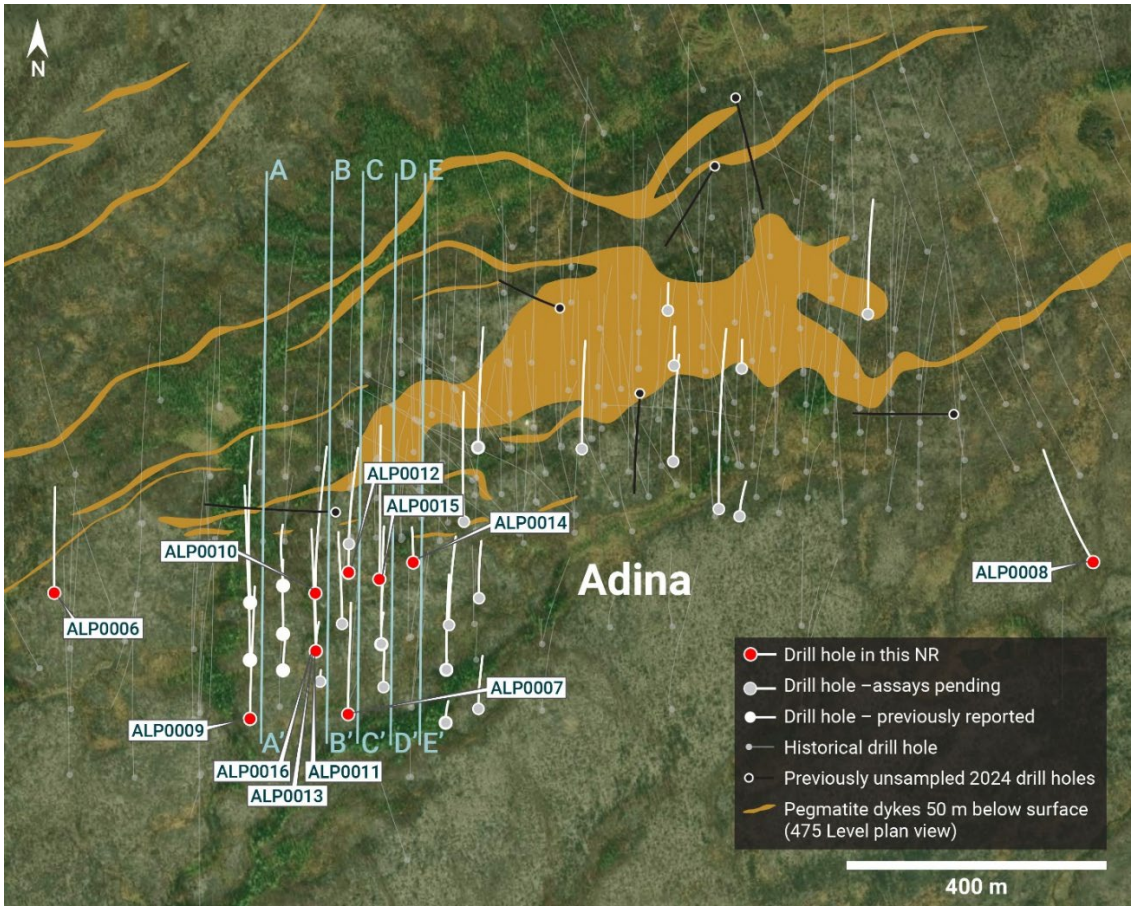


Figure 2 – Plan map showing historical drill traces and LIFT's 2026 drill holes, as well as a level plan of the Adina pegmatite complex at 475 m above sea level, approximately 50 m below the surface and 25 m below the bedrock-till interface.

[3] PMET Resources, ASX announcement released on 20 October 2025.
[4] Sayona Mining Limited, ASX announcement released on 25 August 2025.
[5] Rio Tinto, ASX announcement released on 4 December 2025.

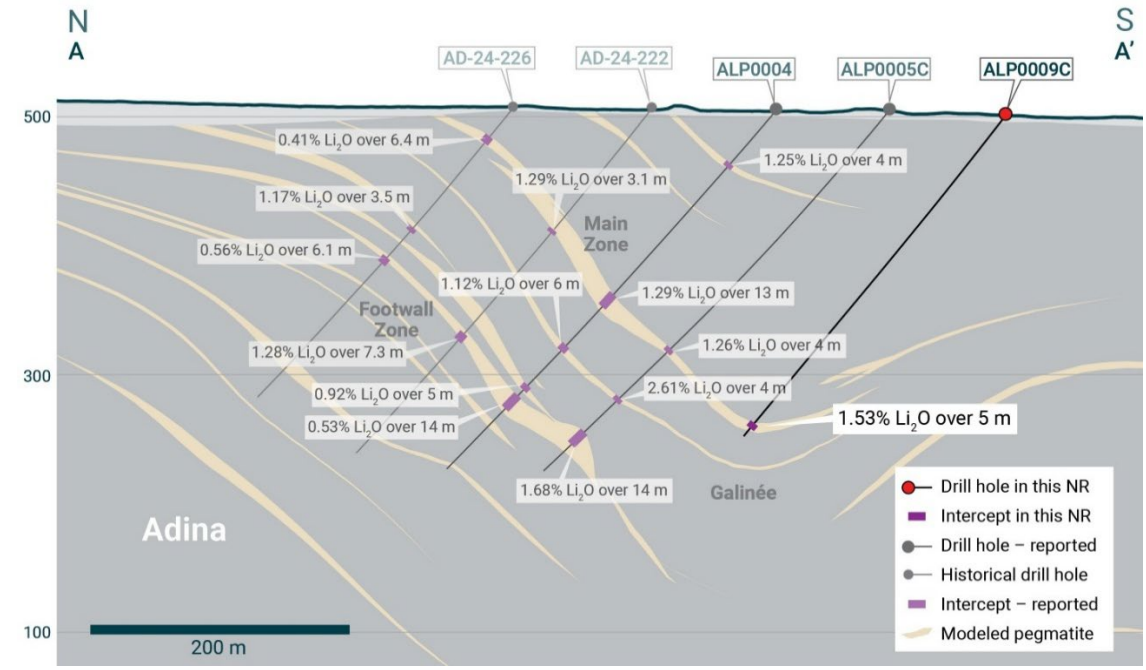


Figure 3 – North–south vertical section A-A', showing interpretation of Adina pegmatite, LIFT's 2026 new and previously released drilling[6] and historical drill results previously reported to the ASX[7]. Section trace A-A' is shown in Figure 2.

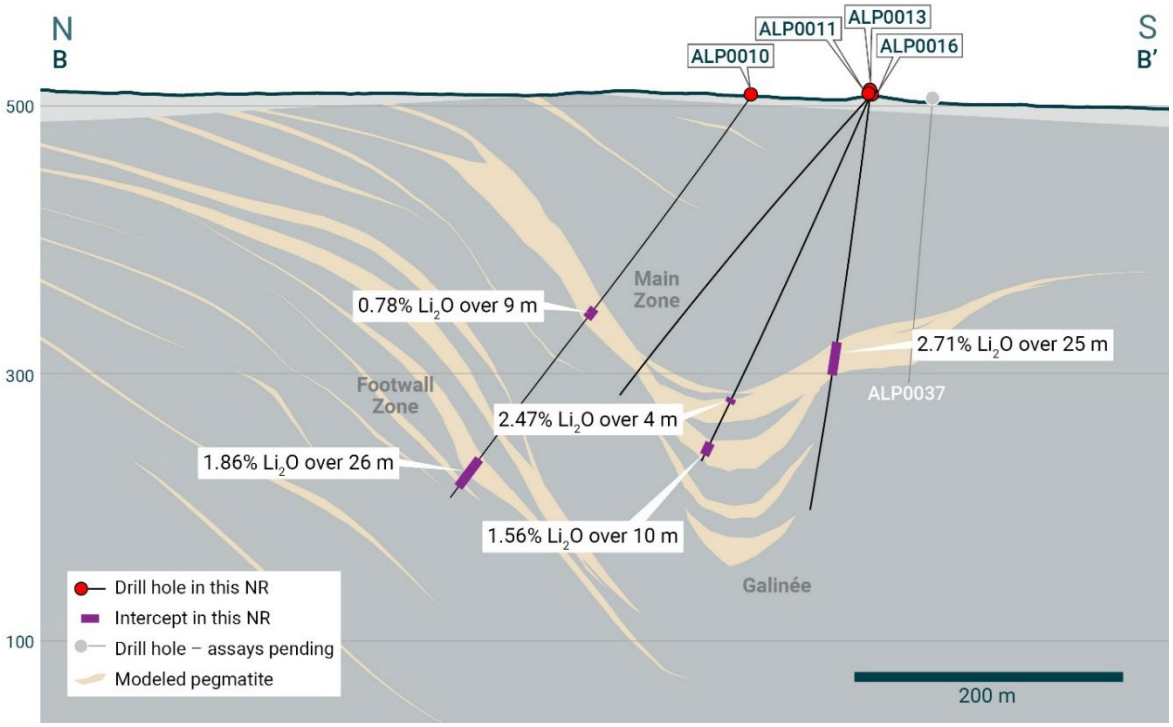


Figure 4 – North–south vertical section B-B', showing interpretation of Adina pegmatite, as well as LIFT's 2026 new and previously released drilling[6]. Section trace B-B' is shown in Figure 2.

[6] LIFT, ASX announcement released on 26 October 2026.
[7] Historical drill intersections starting with "AD" are sourced from Winsome's ASX announcement released 19 August 2024.

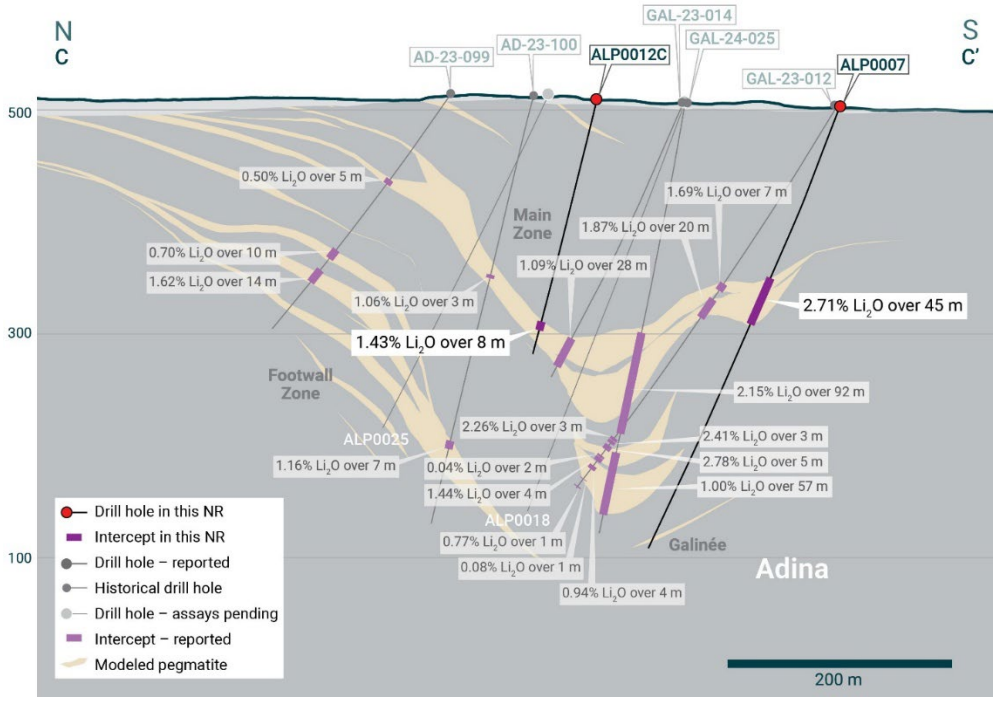


Figure 5 – North–south vertical section C-C', showing interpretation of Adina pegmatite, LIFT's 2026 new and previously released drilling[8] and historical drill results previously reported to the ASX[9],[10]. Section trace C-C' is shown in Figure 2.

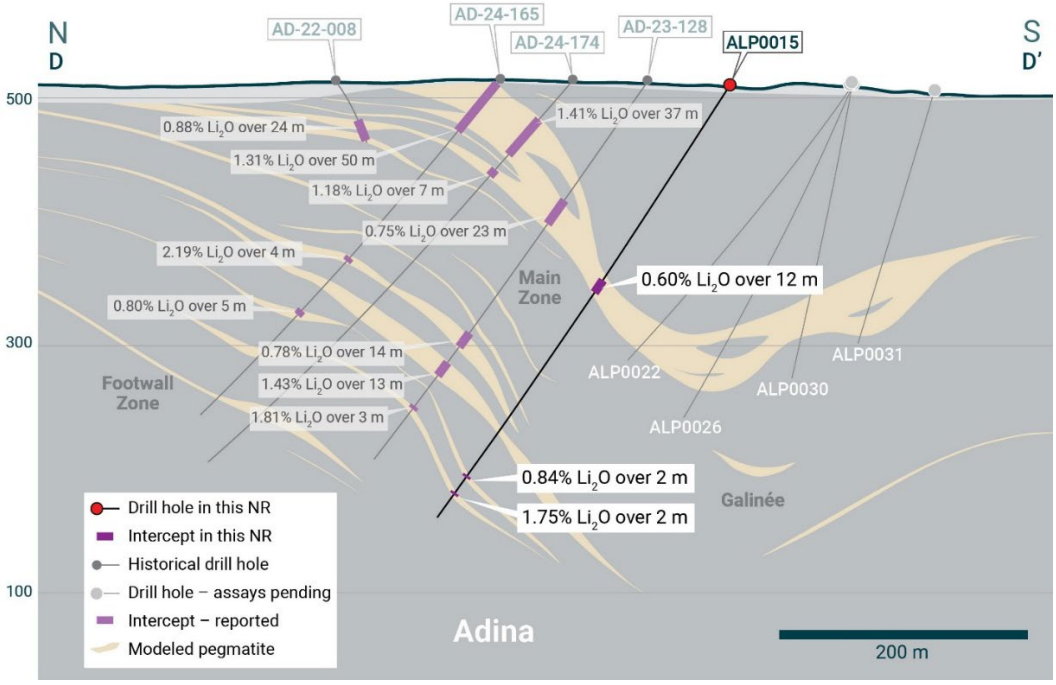


Figure 6 – North–south vertical section D-D', showing interpretation of Adina pegmatite, LIFT's 2026 new and previously released drilling[8] and historical drill results previously reported to the ASX[9],[10]. Section trace D-D' is shown in Figure 2.

[8] LIFT, ASX announcement released on 26 October 2026.
[9] Historical drill intersections starting with "AD" are sourced from Winsome's ASX announcement released 28 May 2024.
[10] Historical drill intersections starting with "GAL" are from LIFT's Prospectus Annexure C released to the ASX on 22 May 2026.

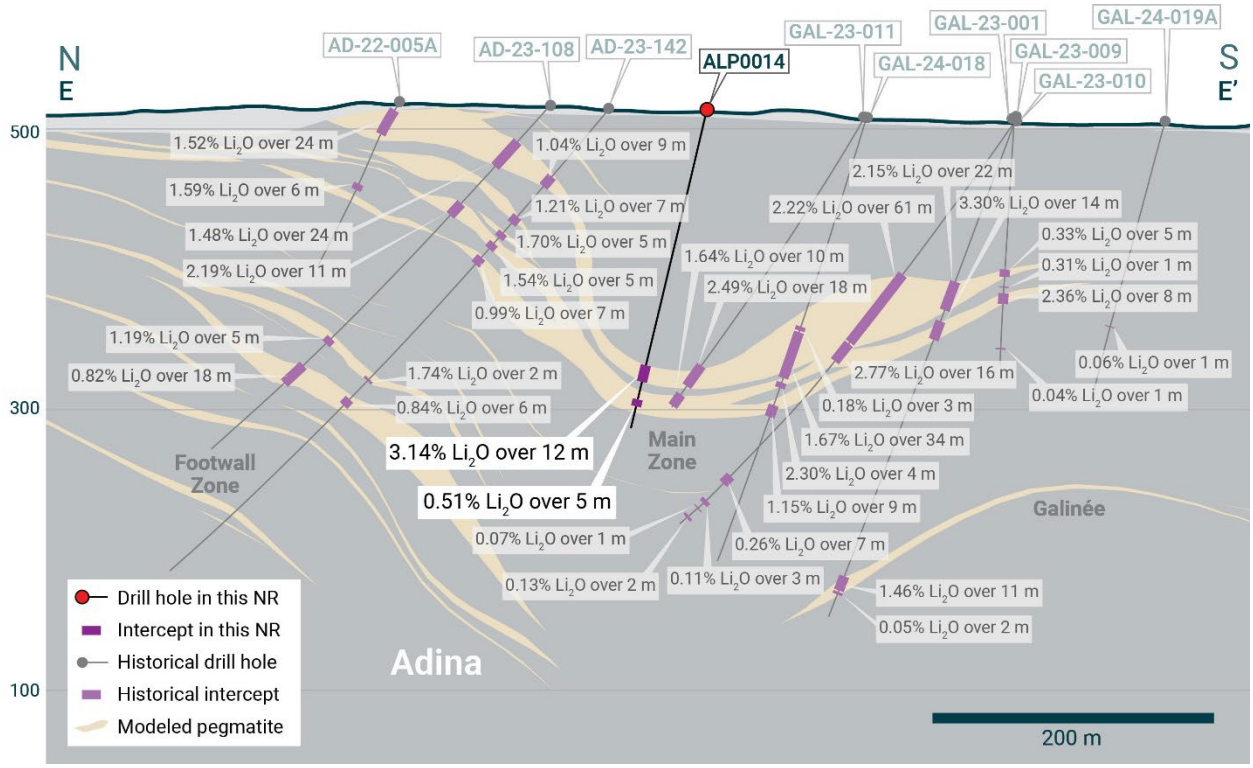


Figure 7 – North–south vertical section E-E' through the Adina pegmatite complex showing results from LIFT's 2026 drillhole ALP0014, as well as historical drill results previously reported to the ASX[11],[12]. Section trace E-E' is shown in Figure 2.

Table 2: Collar information for diamond drill holes presented in this news release.

Drill Hole	NAD83	Easting	Northing	Elevation (m)	Depth (m)	Azimuth (°)	Dip (°)
ALP0006	Zone 18N	667,989	5,908,550	498	231	000	-47
ALP0007	Zone 18N	668,440	5,908,364	501	429	000	-69
ALP0008	Zone 18N	669,582	5,908,597	514	270	331	-49
ALP0009C	Zone 18N	668,289	5,908,357	499	321	000	-52
ALP0010	Zone 18N	668,390	5,908,550	505	375	000	-55
ALP0011	Zone 18N	668,390	5,908,461	507	291	000	-55
ALP0012C	Zone 18N	668,440	5,908,581	509	234	359	-75
ALP0013	Zone 18N	668,390	5,908,461	507	300	000	-67
ALP0014	Zone 18N	668,539	5,908,597	511	231	000	-76
ALP0015	Zone 18N	668,488	5,908,571	508	420	000	-58
ALP0016	Zone 18N	668,390	5,908,460	507	312	000	-83

Quality Assurance and Quality Control

All drill core samples were collected under the supervision of LIFT employees and contractors. Drill core was transported from the drill platform to the core processing facility at the Renard Mine, where it was logged, photographed, and split using a diamond saw prior to sampling.

11 Historical drill intersections starting with "AD" are sourced from Winsome's ASX announcement released 28 May 2024.
12 Historical drill intersections starting with "GAL" are from LIFT's Prospectus Annexure C released to the ASX on 22 May 2026.

Samples were then bagged, and blanks and certified reference materials were inserted at regular intervals. Groups of samples were placed in large bags and sealed with numbered tags to maintain a chain of custody before being transported from LIFT's Renard core logging facility to MSALABS ("MSA"), a commercial laboratory independent of LIFT, for sample preparation (crushing and pulverizing) and lithium assay.

Samples were prepared for analysis by MSA using preparation methods CRU-CPA and PPU-530. Samples were dried in their entirety and crushed to 70% passing 2 mm, and a 500 g subsample was split (CRU-CPA). A 1,000 g sample was pulverized to 85% passing 75 µm (PPU-530). Prepared sample pulps were analyzed using MSA's custom multi-element analytical package PER-700W, involving sodium peroxide fusion of a 0.15 g aliquot followed by inductively coupled plasma atomic emission spectrometry and mass spectrometry (ICP-AES/MS). Lithium concentrations were converted to lithium oxide (Li_2O) using a conversion factor of 2.153.

For further information, please contact:

Francis MacDonald
Chief Executive Officer
Tel: +1.604.609.6185
Email: investors@li-ft.com
Website: www.li-ft.com

John David MacDougall
Investor Relations Manager
Tel: +1.604.609.6185
Email: investors@li-ft.com

This release is authorized by the Board of Directors of LIFT.

About LIFT

LIFT is a Canadian lithium exploration and development company focused on advancing its flagship Adina Lithium Project and the Renard processing facility in the Eeyou Istchee James Bay region of Québec. The Company is working toward becoming Canada's next producer of spodumene concentrate by leveraging its large-scale, high-grade lithium resources and the existing infrastructure at Renard, which LIFT holds under an exclusive option to acquire. LIFT also owns the Yellowknife Lithium Project in the Northwest Territories and maintains additional exploration properties in Canada.

Qualified Person

The disclosure in this news release of scientific and technical information regarding LIFT's mineral properties has been reviewed and approved by Marc-Antoine Laporte, M.Sc., P.Geo., Director Geological Services MIN NAM Global, SGS Geological Services, who is an independent Qualified Person as defined by National Instrument 43-101 Standards of Disclosure for Mineral Projects (NI 43-101).

Competent Person's Statement

Information in this announcement that relates to exploration results is based on and fairly represents information and supporting documentation obtained by LIFT and reviewed and approved by Mr. Marc-Antoine Laporte, M.Sc., P.Geo., Director Geological Services MIN NAM Global, SGS Geological Services, a Competent Person who is a Member of Ordre des géologues du Québec (1347). Mr. Laporte has sufficient experience that is relevant to the style of mineralization and type of deposit under consideration and to the activity which he is undertaking to qualify as a 'Competent Person' as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' ("JORC Code"). Mr. Laporte is an independent consultant with SGS Canada Inc. - SGS Geological Services and Mr.

Laporte consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

Past Exploration Results and Mineral Resource estimates reported in this announcement were first reported by the Company in accordance with ASX Listing Rules 5.7 and 5.8 in its Prospectus lodged with ASIC on 13 April 2026 (the "Prospectus"). The Company confirms that it is not aware of any new information or data that materially affects the information included in the Prospectus and, in the case of the Mineral Resource estimates, that all material assumptions and technical parameters underpinning the estimates in the Prospectus continue to apply and have not materially changed. The Company confirms that the form and content in which the Competent Person's findings are presented here have not been materially modified from the Prospectus. Refer to the Prospectus for further information.

Cautionary Statement Regarding Forward-Looking Information

Certain statements included in this news release constitute forward-looking information or statements (collectively, "forward-looking statements"), including those identified by the expressions "anticipate", "believe", "plan", "estimate", "expect", "intend", "may", "should" and similar expressions to the extent they relate to the Company or its management. The forward-looking statements are not historical facts but reflect current expectations regarding future results or events. These forward-looking statements and information reflect management's current beliefs and are based on assumptions made by and information currently available to the Company with respect to the matter described in this news release.

Forward-looking statements involve risks and uncertainties, which are based on current expectations as of the date of this release and subject to known and unknown risks and uncertainties that could cause actual results to differ materially from those expressed or implied by such statements. Additional information about these assumptions and risks and uncertainties is contained under "Risk Factors" in the Company's latest annual information form filed on April 27, 2026, which is available under the Company's SEDAR+ profile at www.sedarplus.ca, in the Company's prospectus supplement dated August 6, 2026, and in other filings that the Company has made and may make with applicable securities authorities in the future. Forward-looking statements contained herein are made only as to the date of this news release and we undertake no obligation to update or revise any forward-looking statements whether as a result of new information, future events or otherwise, except as required by law. We caution investors not to place considerable reliance on the forward-looking statements contained in this news release.

Neither the TSX Venture Exchange nor its Regulation Services Provider (as that term is defined in the policies of the TSX Venture Exchange) accepts responsibility for the adequacy or accuracy of this news release.

Appendix 1: Diamond drill holes released to date

Table A1-1: Collar information for LIFT's diamond drill holes released to date.

Drill Hole	NAD83	Easting	Northing	Elevation (m)	Depth (m)	Azimuth (°)	Dip (°)
ALP0001	Zone 18N	668,340	5,908,561	505	399	000	-76
ALP0002	Zone 18N	668,340	5,908,431	502	252	000	-76
ALP0003	Zone 18N	668,340	5,908,487	503	435	000	-76
ALP0004	Zone 18N	668,290	5,908,535	503	377	000	-50

Drill Hole	NAD83	Easting	Northing	Elevation (m)	Depth (m)	Azimuth (°)	Dip (°)
ALP0005C	Zone 18N	668,289	5,908,447	504	387	000	-53
ALP0006	Zone 18N	667,989	5,908,550	498	231	000	-47
ALP0007	Zone 18N	668,440	5,908,364	501	429	000	-69
ALP0008	Zone 18N	669,582	5,908,597	514	270	331	-49
ALP0009C	Zone 18N	668,289	5,908,357	499	321	000	-52
ALP0010	Zone 18N	668,390	5,908,550	505	375	000	-55
ALP0011	Zone 18N	668,390	5,908,461	507	291	000	-55
ALP0012C	Zone 18N	668,440	5,908,581	509	234	359	-75
ALP0013	Zone 18N	668,390	5,908,461	507	300	000	-67
ALP0014	Zone 18N	668,539	5,908,597	511	231	000	-76
ALP0015	Zone 18N	668,488	5,908,571	508	420	000	-58
ALP0016	Zone 18N	668,390	5,908,460	507	312	000	-83

Table A1-2: Notable results from LIFT's diamond drill holes released to date.

Hole number	From (m)	To (m)	Interval (m)*	Li_2O (%)	Zone
ALP0001	201	210	9	1.72	Galinée
ALP0001	357	377	20	0.70	Footwall
ALP0002	187	243	56	1.43	Galinée
ALP0003	257	285	28	1.64	Galinée
ALP0004	52	56	4	1.25	Main
ALP0004	188	201	13	1.29	Main
ALP0004	242	248	6	1.12	Main
ALP0004	285	290	5	0.92	Footwall
ALP0004	296	310	14	0.53	Footwall
ALP0005C	249	253	4	1.26	Main
ALP0005C	304	308	4	2.61	Main
ALP0005C	342	356	14	1.68	Footwall
ALP0006	Drilled for geotechnical information				
ALP0007	164	209	45	2.71	Galinée
ALP0008	Drilled for geotechnical information				
ALP0009C	308	313	5	1.53	Main
ALP0010	197	206	9	0.78	Main
ALP0010	339	365	26	1.86	Footwall
ALP0011	No significant intersections				
ALP0012C	204	212	8	1.43	Galinée
ALP0013	248	252	4	2.47	Galinée

Hole number	From (m)	To (m)	Interval (m)*	Li_2O (%)	Zone
ALP0013	285	295	10	1.56	Galinée
ALP0014	185	197	12	3.14	Galinée
ALP0014	210	215	5	0.51	Galinée
ALP0015	186	198	12	0.60	Galinée
ALP0015	378	380	2	0.84	Galinée
ALP0015	395	397	2	1.75	Galinée
ALP0016	185	210	25	2.71	Galinée

*Intersections are reported using a nominal 0.5% Li_2O cut-off grade, with a minimum composite width of 5 metres and maximum consecutive internal dilution of 5 metres. Intervals are downhole lengths; true thickness is unknown.